

# Closed Fiberglass Water Slide Model 1929-32

## Specifications

**Description:** 32" I.D. closed fiberglass flume slide featuring 360° curves.

**Centerline Run:** 64' 7-7/16"

**Entry Height:** 14' 11-1/4"

**Platform Size:** 3' x 5'


**Space Requirements:** 19' 3-3/8" x 17' 6-3/4"

## Features

- 32" inside diameter closed fiberglass flume.
- Flume: ultra violet stabilized gelcoat.
- Platform: Aqua-Plast coated textured aluminum surface.
- Stairs: 7" rise, 11" tread, 36" wide; Aqua-Plast coated textured aluminum surface; closed risers.
- Stainless steel base plates, hardware and anchor bolts
- Designed with flexibility to allow for sloping pool decks
- 40 - 60 gpm required.
- Splash down dimension 13' 1" x 20' 0"
- Minimum water depth: 3' 0" (within 6" of water level)
- USA Made

## Options

- Deluxe Series: Complete package is stainless steel polyester powder coated except the stair treads and deck which are textured Aqua-Plast coated aluminum.
- North Star Series: Mild steel with chemical resistant Aqua-Kote undercoating with polyester powder coat topcoat, except stair treads and deck which are textured Aqua-Plast coated aluminum.
- Hot dipped galvanized available
- Stairs: (a) 48" width; (b) Inner handrails (if applicable); (c) Spiral stairs
- Stair Configurations: Many variations available
- Gates: Locking gate to water slide flume entrance.
- Flag and banner holders.
- Tower Roof: (a) Steel; (b) Wood; (c) Fabric; (d) Tongue & groove decking with wood or steel roofs.
- Water pumps & covers
- Perimeter Fencing around water slide
- Factory installation or on-site technical assistance.

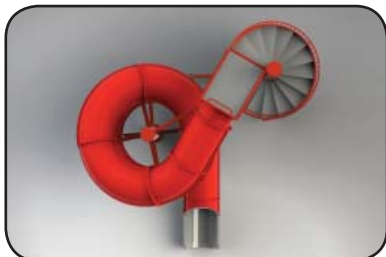

PO Box 270, Baker City, OR 97814 (541) 523-0224 (800) 252-8475 [www.naturalstructures.com](http://www.naturalstructures.com) - [info@naturalstructures.com](mailto:info@naturalstructures.com)

\*Space requirements may vary with options chosen.