



# Double Flume Water Slide Model 9412-32

## Specifications

**Description:** Double 32" I.D. fiberglass flume slide. (Flume 1) 360° turn & (Flume 2) 180° turn.  
**Centerline Run:** (1): 41' 9" & (2): 33' 9"


**Entry Height:** 10' 5"

**Platform Size:** 8' x 8'

**Space Requirements:** 25' 5" x 19' 10" \*

## Features

- 32" inside diameter closed fiberglass flumes.
- Flume: ultra violet stabilized gelcoat.
- Platform: Aqua-Plast coated textured aluminum surface.
- Stairs: 7" rise, 11" tread, 36" wide; Aqua-Plast coated textured aluminum surface; closed risers.
- Stainless steel base plates, hardware and anchor bolts.
- Designed with flexibility to allow for sloping pool decks.
- 40-60 gpm water flow (each flume) required.
- Splash down dimension: 20' 0" x 20' 0"
- Minimum water depth: 3' 0"
- USA Made

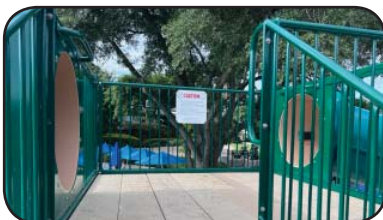

## Options

- Deluxe Series: Stainless steel polyester powder coated except tower and flume posts which are mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- North Star Series: Mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- Hot dipped galvanized available
- Stairs: (a) 48" width; (b) Inner handrails (if applicable); (c) Spiral stairs
- Stair Configurations: Many variations available
- Gates: Locking gate to flume entrance.
- Flag and banner holders.
- Tower Roof: (a) Steel; (b) Wood; (c) Fabric; (d) Tongue & groove decking with wood or steel roofs.
- Water pumps & covers
- Perimeter Fencing
- Factory installation or on-site technical assistance.



PO Box 270, Baker City, OR 97814  
 (541) 523-0224 (800) 252-8475 Fax (541) 523-0231  
[www.naturalstructures.com](http://www.naturalstructures.com) - [info@naturalstructures.com](mailto:info@naturalstructures.com)

\*Space requirements may vary with options chosen.