



Open Fiberglass Flume Pool Slide Model 1800-52

Specifications

Description: Single fiberglass open flume family fun slide.

Centerline Run: 7' 9"


Entry Height: 2' 11"

Platform Size: 5' x 3'

Space Requirements: 5' 6" x 14' 9"

Features

- Fiberglass water slide flume, 60" inside width.
- Flume: Ultra violet stabilized gelcoat.
- Platform: Aqua-Plast coated textured aluminum surface.
- Stairs (both sides): 7" rise, 11" tread, 36" wide; Aqua-Plast coated textured aluminum surface; closed risers.
- Stainless steel base plates, hardware & anchor bolts.
- Designed with flexibility to allow for sloping pool decks.
- Water flow required: 10-20 gpm @ 20 psi max
- Splash down dimension: 13' x 20'
- Minimum water depth: 0" - 2'
- USA Made

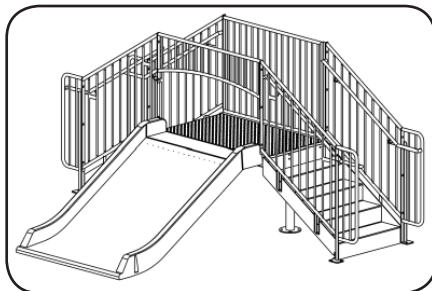

Options

- Deluxe Series: Stainless steel polyester powder coated except tower and flume posts which are mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- North Star Series: Mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- Stairs: Inner handrails (if applicable).
- Gates: Locking gate to flume entrance.
- Flag and banner holders.
- Tower Roof: (a) Steel; (b) Wood; (c) Fabric; (d) Tongue & groove decking with wood or steel roofs.
- Water pumps & covers
- Perimeter Fencing
- Factory installation or on-site technical assistance.



PO Box 270, Baker City, OR 97814 (541) 523-0224 (800) 252-8475 www.naturalstructures.com - info@naturalstructures.com